

Cuvo Pumping Solutions, Inc.

16535 Hollister St., Ste. C
Houston TX 77066
713-460-8828 Direct 713-460-8838 Fax
www.cuvopumpingsolutions.com

Hi-Lo Supreme 12 AWG 2 conductor plus ground twisted submersible pump cable.

Insulated with a premium thermoplastic elastomer (TPE) material.

PACKAGE CABLE


Hi-Lo supreme twisted type, UL approved cable furnished in pre-cut lengths with water tight Viton plug on one end for direct connection to Franklin 4" and 6" motors. Cable uses stranded copper conductors.

APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Suitable for hot or cold conditions, from -50.F to 200.F, 105.C dry, 75.C wet, 60.C in oil.

STPE thermoplastic rubber is inherently resistant to a wide variety of oils, solvents and chemicals.

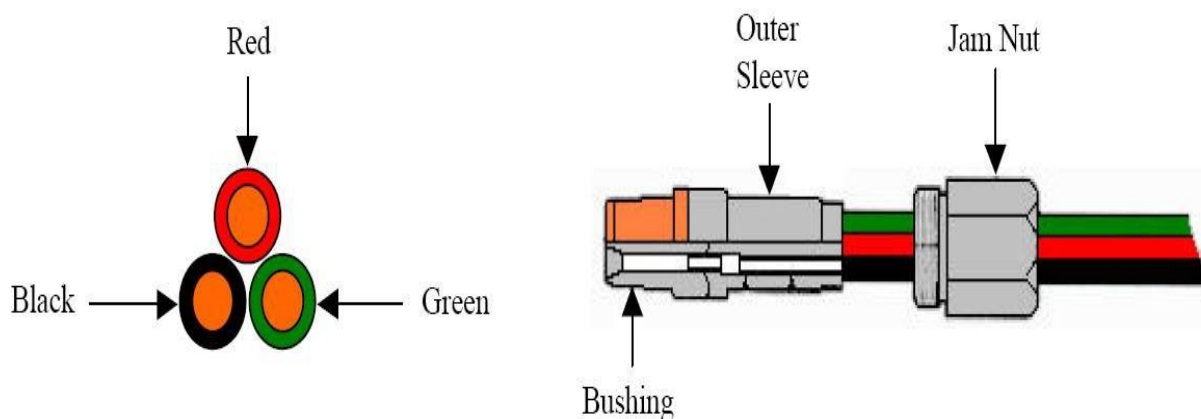

CONSTRUCTION: Jam nut/sleeve - 316 stainless steel, bushing - 4" Viton, sleeve 316 stainless steel

CONDUCTORS: **12 AWG 19/25 TPC**

INSULATION: STPE .045" wall nom.

COLOR CODE: Black, Red, Green

OVERALL DIAMETER: 0.405"

WEIGHT: 89.8 lb/1000 ft.