

## ***Cuvo Pumping Solutions, Inc.***

16535 Hollister St., Ste. C  
Houston TX 77066  
713-460-8828 Direct 713-460-8838 Fax  
www.cuvopumpingsolutions.com

### **Hi-Lo Supreme 12 AWG 3 conductor plus ground twisted submersible pump cable.**

**Insulated with a premium thermoplastic elastomer (TPE) material.**

#### PACKAGE CABLE


Hi-Lo supreme twisted type, UL approved cable furnished in pre-cut lengths with water tight Viton plug on one end for direct connection to Franklin 4" and 6" motors. Cable uses stranded copper conductors.

#### APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Suitable for hot or cold conditions, from -50.F to 200.F, 105.C dry, 75.C wet, 60.C in oil.

STPE thermoplastic rubber is inherently resistant to a wide variety of oils, solvents and chemicals.

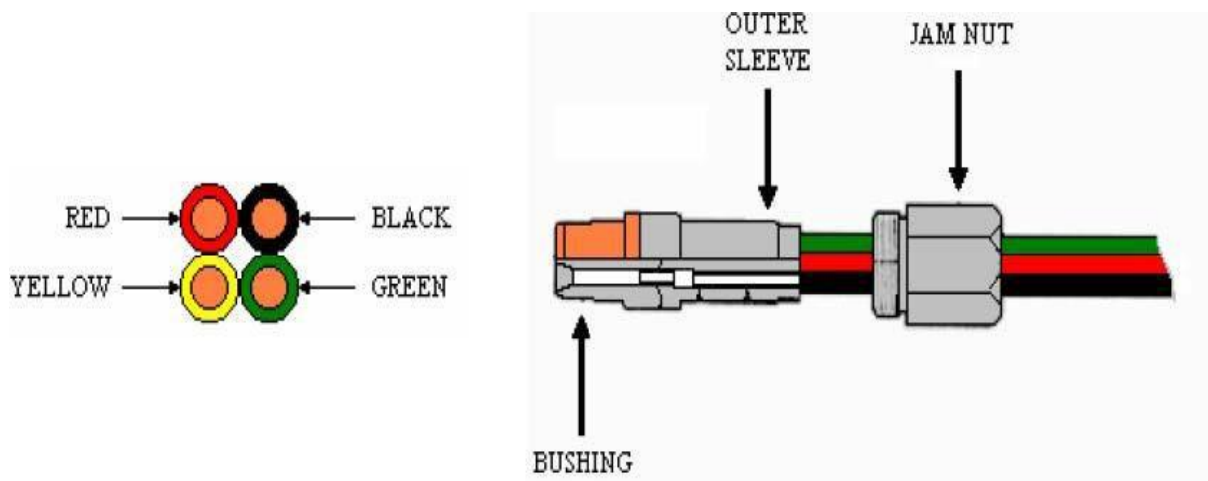

CONSTRUCTION: Jam nut/sleeve - 316 stainless steel, bushing - 4" Viton / 6" Polychloroprene

CONDUCTORS: **19 STR**

INSULATION: STPE .045" wall nom.

COLOR CODE: Black, Yellow, Red, Green

OVERALL DIAMETER: 0.455"

WEIGHT: 119 lb/1000 ft.