

Cuvo Pumping Solutions, Inc.

16535 Hollister St., Ste. C
Houston TX 77066
713-460-8828 Direct 713-460-8838 Fax
www.cuvopumpingsolutions.com

#12 AWG 3 CONDUCTOR PLUS GROUND PVC FLAT SUBMERSIBLE PUMP CABLE

PACKAGE CABLE

Flat Parallel Type THW, UL approved cable furnished in pre-cut lengths with water tight neoprene plug on one end for direct connection to Franklin motor. Stranded copper conductor, 3 wire with ground.


APPLICATION

For use with submersible pumps in water wells, cable is UL approved for this application.

Manufactured in accordance with UL83 specification for 75°C Type THW cable

Cable features stranded copper conductors, bare, with a moisture resistant plastic insulation.

Note: Not for use with contaminated water. Please see our remediation motor leads for handling contaminated water.

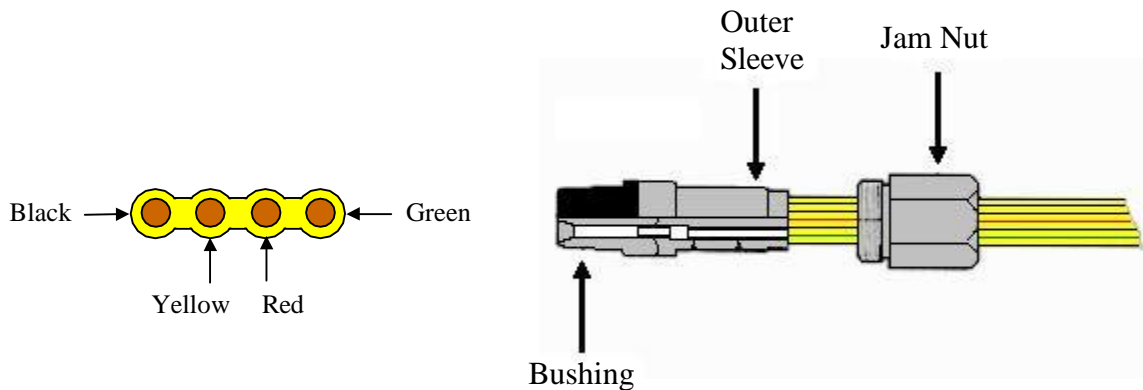

CONSTRUCTION: Jam nut 303 Stainless steel, bushing-neoprene, sleeve 304 stainless

CONDUCTORS: 12 AWG 19 x 0.0185"

INSULATION: Plastic .045" wall nom.

COLOR CODE: Black, Red, Green, and Yellow

FINAL O.D. 0.185" x 0.830"

WEIGHT: 133.9# / 1000'Nom