

LMP 307

Stainless Steel Probe

Stainless Steel Sensor

accuracy according to IEC 60770:
Standard: 0.35 % FSO
Option: 0.25 % / 0.1 % FSO



Stainless Steel Probe

LMP 307

Nominal pressure

from 0 ... 1 mH₂O
up to 0 ... 250 mH₂O

Special characteristics

- ▶ diameter 27 mm
- ▶ small thermal effect
- ▶ excellent accuracy
- ▶ excellent long term stability

Optional versions

- ▶ IS-protection zone 0
- ▶ SIL 2 (Safety Integrity Level)
- ▶ cable protection via corrugated pipe
- ▶ different kinds of cables
- ▶ different kinds of elastomers

The stainless steel probe LMP 307 is designed for continuous level measurement in water and clean or waste fluids.

Basic element is a high quality stainless steel sensor with high requirements for exact measurement with excellent long term stability.

Preferred areas of use are

Water



drinking water system
ground water level measurement
rain spillway basin
pump and booster stations
level measurement in container

Sewage



water treatment plants
waste water treatment
water recycling

Fuel / Oil



fuel storage
tank farm



| Input pressure range | | | | | | | | | | | | | |
|--|---|-----------------|------|-------|-----|-----|----------|-----|----|----|-----|-----|-----|
| Nominal pressure gauge [bar] | 0.1 | 0.16 | 0.25 | 0.4 | 0.6 | 1 | 1.6 | 2.5 | 4 | 6 | 10 | 16 | 25 |
| Level [mH ₂ O] | 1 | 1.6 | 2.5 | 4 | 6 | 10 | 16 | 25 | 40 | 60 | 100 | 160 | 250 |
| Overpressure [bar] | 0.5 | 1 | 1 | 2 | 5 | 5 | 10 | 10 | 20 | 40 | 40 | 80 | 80 |
| Burst pressure ≥ [bar] | 1.5 | 1.5 | 1.5 | 3 | 7.5 | 7.5 | 15 | 15 | 25 | 50 | 50 | 120 | 120 |
| Output signal / Supply | | | | | | | | | | | | | |
| Standard | 2-wire: 4 ... 20 mA / V _s = 8 ... 32 V _{DC} | | | | | | | | | | | | |
| Option Ex-protection | 2-wire: 4 ... 20 mA / V _s = 10 ... 28 V _{DC} | | | | | | | | | | | | |
| Options 3-wire | 3-wire: 0 ... 20 mA / V _s = 14 ... 30 V _{DC} 0 ... 10 V / V _s = 14 ... 30 V _{DC} | | | | | | | | | | | | |
| Performance | | | | | | | | | | | | | |
| Accuracy | standard: nominal pressure < 0.4 bar: ≤ ± 0.5 % FSO nominal pressure ≥ 0.4 bar: ≤ ± 0.35 % FSO option 1: nominal pressure ≥ 0.4 bar: ≤ ± 0.25 % FSO option 2: for all nominal pressures: ≤ ± 0.1 % FSO | | | | | | | | | | | | |
| Permissible load | current 2-wire: R _{max} = [(V _s - V _{s min}) / 0.02] ∧ current 3-wire: R _{max} = 500 ∧ voltage 3-wire: R _{min} = 10 k∧ | | | | | | | | | | | | |
| Influence effects | supply: 0.05 % FSO / 10 V load: 0.05 % FSO / k∧ | | | | | | | | | | | | |
| Long term stability | ≤ ± 0.1 % FSO / year | | | | | | | | | | | | |
| Response time | 2-wire: ≤ 10 msec 3-wire: ≤ 3 msec | | | | | | | | | | | | |
| ¹ accuracy according to IEC 60770 – limit point adjustment (non-linearity, hysteresis, repeatability) | | | | | | | | | | | | | |
| Thermal effects (Offset and Span) | | | | | | | | | | | | | |
| Nominal pressure P _N [bar] | < 0.40 | | | | | | ≥ 0.40 | | | | | | |
| Tolerance band [% FSO] | ≤ ± 1 | | | | | | ≤ ± 0.75 | | | | | | |
| in compensated range [°C] | 0 ... 70 | | | | | | | | | | | | |
| Permissible temperatures | | | | | | | | | | | | | |
| Permissible temperatures | medium: -10 ... 70 °C storage: -25 ... 70 °C | | | | | | | | | | | | |
| Electrical protection ² | | | | | | | | | | | | | |
| Short-circuit protection | permanent | | | | | | | | | | | | |
| Reverse polarity protection | no damage, but also no function | | | | | | | | | | | | |
| Electromagnetic compatibility | emission and immunity according to EN 61326 | | | | | | | | | | | | |
| ² additional external overvoltage protection unit in terminal box KL 1 or KL 2 with atmospheric pressure reference available on request | | | | | | | | | | | | | |
| Electrical connection | | | | | | | | | | | | | |
| Cable with sheath material ³ | PVC | (-5 ... 70 °C) | | grey | | | | | | | | | |
| | PUR | (-10 ... 70 °C) | | black | | | | | | | | | |
| | FEP | (-10 ... 70 °C) | | black | | | | | | | | | |
| ³ cable with integrated air tube for atmospheric pressure reference | | | | | | | | | | | | | |
| Materials (media wetted) | | | | | | | | | | | | | |
| Housing | stainless steel 1.4404 (316L) | | | | | | | | | | | | |
| Seals | FKM; others on request | | | | | | | | | | | | |
| Diaphragm | stainless steel 1.4435 (316L) | | | | | | | | | | | | |
| Protection cap | POM | | | | | | | | | | | | |
| Explosion protection (only for 4 ... 20 mA / 2-wire) | | | | | | | | | | | | | |
| Approval DX19-LMP 307 | IBExU10ATEX1068X zone 0: II 1 G Ex ia IIC T4 Ga zone 20: II 1 D Ex iaD 20T85°C | | | | | | | | | | | | |
| Safety technical maximum values | U _i = 28 V, I _i = 93 mA, P _i = 660 mW, C _i ≈ 0 nF, L _i ≈ 0 μH | | | | | | | | | | | | |
| Permissible media temperature | in zone 0: -10 ... 60 °C with p _{atm} 0.8 bar up to 1.1 bar in zone 1 or higher: -10 ... 70 °C | | | | | | | | | | | | |
| Connecting cables (by factory) | cable capacitance: signal line/shield also signal line/signal line: 160 pF/m cable inductance: signal line/shield also signal line/signal line: 1 μH/m | | | | | | | | | | | | |
| Miscellaneous | | | | | | | | | | | | | |
| Option SIL 2 application | according to IEC 61508 / IEC 61511 | | | | | | | | | | | | |
| Current consumption | signal output current: max. 25 mA signal output voltage: max. 7 mA | | | | | | | | | | | | |
| Weight | approx. 200 g (without cable) | | | | | | | | | | | | |
| Ingress protection | IP 68 | | | | | | | | | | | | |
| CE-conformity | EMC Directive: 2004/108/EC | | | | | | | | | | | | |


LMP 307

Stainless Steel Probe


Technical Data

Wiring diagrams

2-wire-system (current)

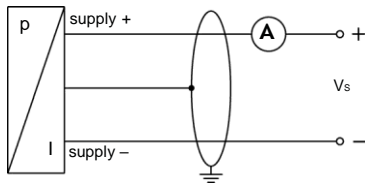

3-wire-system (current / voltage)

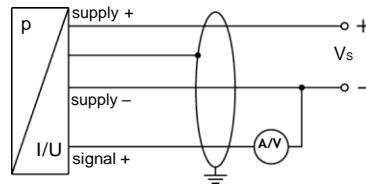


Pin configuration


| Electrical connection | cable colours (DIN 47100) |
|------------------------|---------------------------|
| Supply + | wh (white) |
| Supply - | bn (brown) |
| Signal + (only 3-wire) | gn (green) |
| Shield | gn/ye (green / yellow) |

Dimensions (in mm)

standard

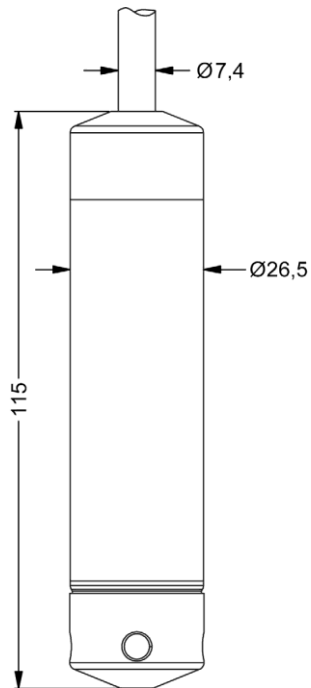

option

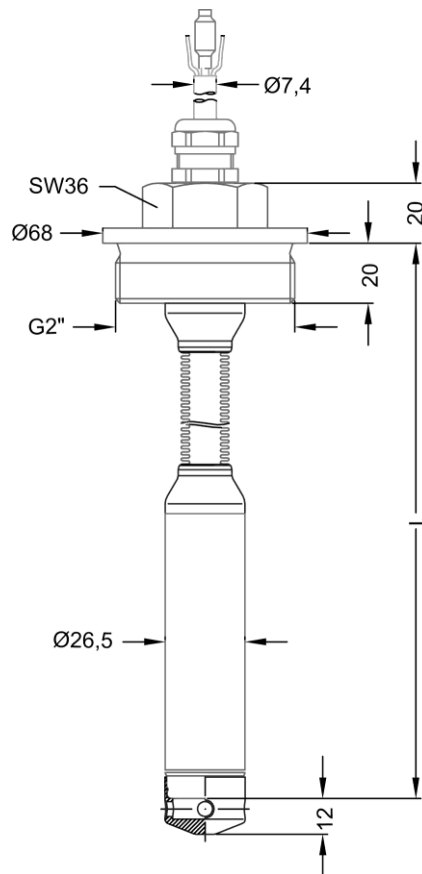

cable protection
with corrugated pipe


∅ Total length of devices with accuracy 0.1 % FSO IEC 60770 increases by 35 mm!

Mounting flange with cable gland

Technical data

| | | |
|-------------------------|---|---------------|
| Suitable for | all probes | |
| Flange material | stainless steel 1.4404 (316L) | |
| Material of cable gland | standard: brass, nickel plated on request: stainless steel 1.4305 (303); plastic | |
| Seal insert | material: TPE (ingress protection IP 68) | |
| Hole pattern | according to DIN 2507 | |
| Version | Size (in mm) | Weight |
| DN25 / PN40 | D = 115, k = 85, b = 18, n = 4, d = 14 | 1.4 kg |
| DN50 / PN40 | D = 165, k = 125, b = 20, n = 4, d = 18 | 3.2 kg |
| DN80 / PN16 | D = 200, k = 160, b = 20, n = 8, d = 18 | 4.8 kg |

cable gland M16x1.5 with seal insert (for cable- \varnothing 4 ... 11 mm)

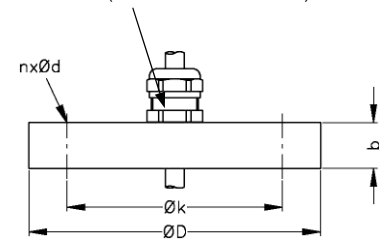

Ordering type


| | |
|---|---------|
| DN25 / PN40 with cable gland brass, nickel plated | ZMF2540 |
| DN50 / PN40 with cable gland brass, nickel plated | ZMF5040 |
| DN80 / PN16 with cable gland brass, nickel plated | ZMF8016 |

Ordering code

Terminal clamp

Technical data

| | |
|--------------|--|
| Suitable for | all probes with cable \varnothing 5.5 ... 10.5 mm |
| Material | standard: steel, zinc plated optionally: stainless steel 1.4301 (304) |
| Weight | approx. 160 g |

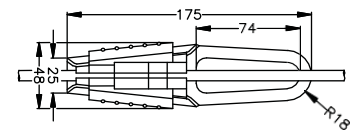

Ordering type

| | |
|--|---------|
| Terminal clamp, steel, zinc plated | Z100528 |
| Terminal clamp, stainless steel 1.4301 (304) | Z100527 |

Ordering code

Display program

CIT 200

Process display with LED display

CIT 250

Process display with LED display and contacts

CIT 300

Process display with LED display, contacts and analogue output

CIT 350

Process display with LED display, bargraph, contacts and analogue output

CIT 400

Process display with LED display, contacts, analogue output and Ex-approval

CIT 600

Multichannel process display with graphics-capable LC display

CIT 650

Multichannel process display with graphics-capable LC display and datalogger

CIT 700

Multichannel process display with graphics-capable TFT monitor, touchscreen and contacts

PA 440

Field display with 4-digit LC display





Distributed by:

Cuvo Pumping Solutions, Inc.

16535 Hollister St., Ste. C
Houston TX 77066

888-368-8318 Toll Free
713-460-8828 Direct
713-460-8838 Fax

www.cuvopumpingsolutions.com